


## TECHNICAL DATA SHEET

### SAB 50R/1000

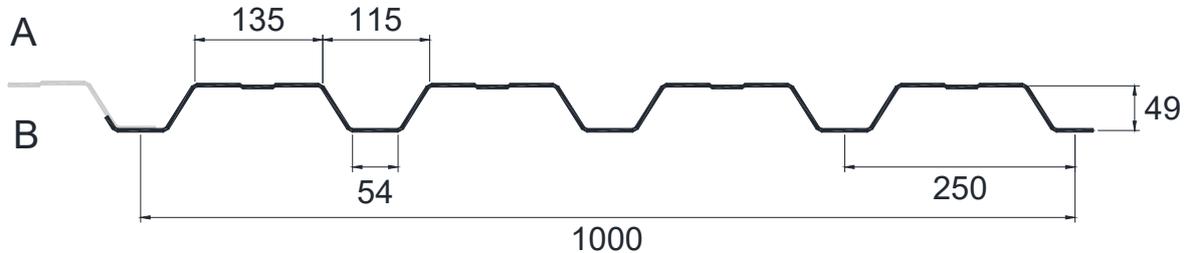

Gauge	Weight
0,75 mm	7,36 kg/m <sup>2</sup>
0,88 mm	8,64 kg/m <sup>2</sup>
1,00 mm	9,81 kg/m <sup>2</sup>
1,25 mm	12,27 kg/m <sup>2</sup>

#### STEEL GRADE

Minimal S-320 GD+Z / ZM / ZA / AZ

#### SUSTAINABILITY

Environmentally relevant product information (EPD) are published on [www.sabprofiel.com](http://www.sabprofiel.com)

#### QUALITY CONTROL

We guarantee that the product has been produced according the valid standards and directives

#### REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1 for coating systems unto 65 µm

#### SPANS

Depend on wind loads, deflection limitations and safety factors.  
See our SAB-brochure for more information

#### STANDARDS

Production according ISO 9001, ISO 14001 and BES 6001  
CE-marking and Declaration of Performance according EN 1090  
Tolerances according PPA-Europe Quality Regulations  
Steel grade according EN 10346

IJsselstein, April 2024