


TECHNICAL DATA SHEET

SAB 153R/840

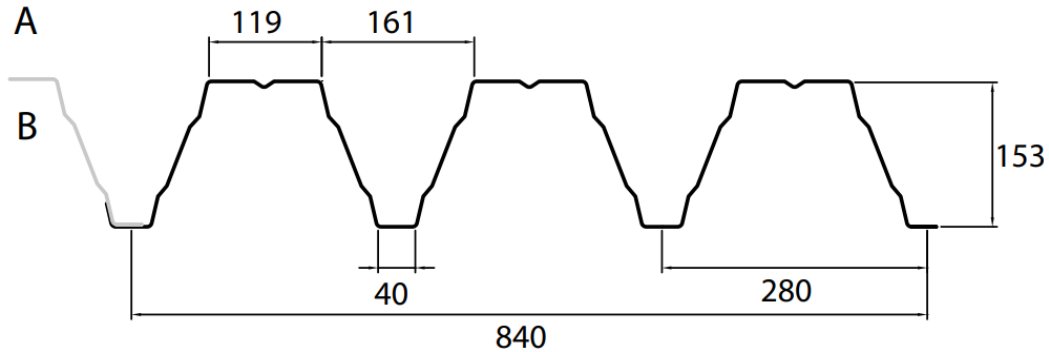

Gauge	Weight
0,75 mm	10,51 kg/m ²
0,88 mm	12,34 kg/m ²
1,00 mm	14,02 kg/m ²
1,13 mm	15,84 kg/m ²
1,25 mm	17,52 kg/m ²
1,50 mm	21,03 kg/m ²

STEEL GRADE

Minimal S-320 GD+Z / ZM / ZA / AZ

SUSTAINABILITY

Environmentally relevant product information (EPD) are published on www.sabprofil.com

QUALITY CONTROLE

We guarantee that the product has been produced according the valid standards and directives

REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1 for coating systems unto 65 µm

SPANS

Depend on wind loads, deflection limitations and safety factors.

See our SAB-brochure for more information

STANDARDS

Production according ISO 9001, ISO 14001 and BES 6001

CE-marking and Declaration of Performance according EN 1090

Tolerances according PPA-Europe Quality Regulations

Steel grade according EN 10346

IJsselstein, April 2024